


TRITON SUBSTATION PROJECT

INITIAL STUDY

NOVEMBER 2009

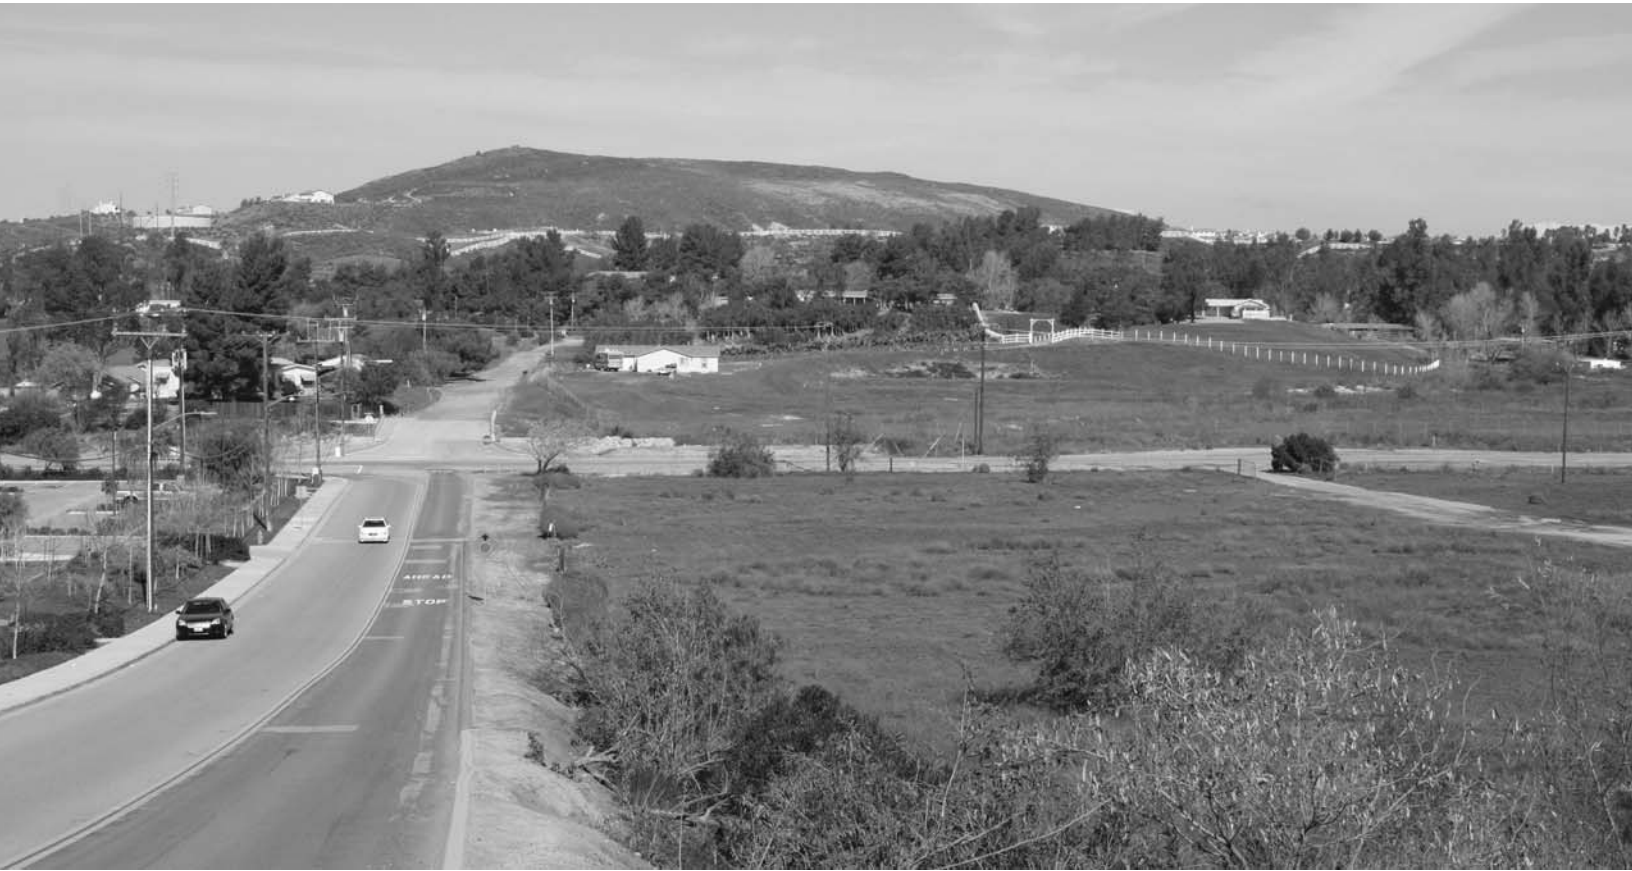

Prepared for:



**State of California
Public Utilities
Commission**

Prepared by:



ecology and environment, inc.
International Specialists in the Environment

This page intentionally left blank

Table of Contents

1.0	Background Information.....	1-1
1.1	Project Title.....	1-1
1.2	Lead Agency Name and Address.....	1-1
1.3	Lead Agency Contact Person and Phone Number.....	1-1
1.4	Project Location.....	1-1
1.5	Project Sponsor’s Name and Address.....	1-1
1.6	General Plan Designation.....	1-1
1.7	Zoning.....	1-2
1.8	Description of the Project.....	1-2
	1.8.1 Project Overview.....	1-2
	1.8.2 Applicant’s Purpose and Need.....	1-7
	1.8.3 Project Objectives.....	1-8
	1.8.4 Project Facilities.....	1-8
	1.8.5 Construction.....	1-17
	1.8.6 Operation and Maintenance.....	1-20
	1.8.7 Project Design Considerations.....	1-23
1.9	Surrounding Land Uses and Setting.....	1-29
1.10	Other Public Agencies Whose Approval is Required.....	1-29
2.0	Environmental Determination.....	2-1
2.1	Environmental Factors Potentially Affected.....	2-1
2.2	Determination.....	2-1
3.0	Evaluation of Environmental Impacts.....	3-1
3.1	Aesthetics.....	3.1-1
	3.1.1 Setting.....	3.1-1
	3.1.2 Environmental Impacts and Mitigation Measures.....	3.1-15
3.2	Agriculture and Forest Resources.....	3.2-1
	3.2.1 Setting.....	3.2-1
	3.2.2 Environmental Impacts and Mitigation Measures.....	3.2-4
3.3	Air Quality and Greenhouse Gases.....	3.3-1
	3.3.1 Setting.....	3.3-1
	3.3.2 Environmental Impacts and Mitigation Measures.....	3.3-9
3.4	Biological Resources.....	3.4-1
	3.4.1 Setting.....	3.4-1
	3.4.2 Environmental Impacts and Mitigation Measures.....	3.4-9
3.5	Cultural Resources.....	3.5-1
	3.5.1 Setting.....	3.5-1
	3.5.2 Environmental Impacts and Mitigation Measures.....	3.5-6

3.6	Geology and Soils.....	3.6-1
3.6.1	Setting	3.6-1
3.6.2	Environmental Impacts and Mitigation Measures	3.6-6
3.7	Hazards and Hazardous Materials	3.7-1
3.7.1	Setting	3.7-1
3.7.2	Environmental Impacts and Mitigation Measures	3.7-3
3.8	Hydrology and Water Quality.....	3.8-1
3.8.1	Setting	3.8-1
3.8.2	Environmental Impacts and Mitigation Measures	3.8-6
3.9	Land Use and Planning.....	3.9-1
3.9.1	Setting	3.9-1
3.9.2	Environmental Impacts and Mitigation Measures	3.9-4
3.10	Mineral Resources	3.10-1
3.10.1	Setting	3.10-1
3.10.2	Environmental Impacts and Mitigation Measures	3.10-2
3.11	Noise	3.11-1
3.11.1	Setting	3.11-1
3.11.2	Environmental Impacts and Mitigation Measures	3.11-9
3.12	Population and Housing.....	3.12-1
3.12.1	Setting	3.12-1
3.12.2	Environmental Impacts and Mitigation Measures	3.12-3
3.13	Public Services.....	3.13-1
3.13.1	Setting	3.13-1
3.13.2	Environmental Impacts and Mitigation Measures	3.13-3
3.14	Recreation	3.14-1
3.14.1	Setting	3.14-1
3.14.2	Environmental Impacts and Mitigation Measures	3.14-1
3.15	Transportation and Traffic	3.15-1
3.15.1	Setting	3.15-1
3.15.2	Environmental Impacts and Mitigation Measures	3.15-5
3.16	Utilities and Service Systems.....	3.16-1
3.16.1	Setting	3.16-1
3.16.2	Environmental Impacts and Mitigation Measures	3.16-3
3.17	Mandatory Findings of Significance.....	3.17-1
3.17.1	Environmental Impacts and Mitigation Measures	3.17-1
4.0	List of Preparers, Agencies, and Persons Contacted.....	4-1
4.1	Lead Agency	4-1
4.2	Project Management and Document Production	4-1
4.3	Persons Contacted.....	4-1
5.0	Mitigation Monitoring, Reporting, and Compliance Plan	5-1

Appendices

A. Review of Alternative Substation Locations A-1

B. Air Quality and Greenhouse Gas Emissions B-1

C. Biological Survey Maps C-1

This page intentionally left blank

Tables

Table 1.8-1	Triton Substation Project Construction Timetable.....	1-21
Table 1.8-2	Triton Substation Project Construction Personnel and Equipment Summary	1-21
Table 1.8-3	Project Design Features (PDFs).....	1-23
Table 3.1-1	Aesthetics Checklist	3.1-1
Table 3.2-1	Agriculture and Forest Resources Checklist.....	3.2-1
Table 3.2-2	Significant Farmland within the Temecula Planning Area.....	3.2-1
Table 3.2-3	Top Five Counties in Terms of Loss of Farmland 2004–2006 .	3.2-2
Table 3.3-1	Air Quality and Greenhouse Gases Checklist	3.3-1
Table 3.3-2	Ambient Air Quality Standards.....	3.3-2
Table 3.3-3	Attainment Status for South Coast Air Quality Management District—Riverside County	3.3-3
Table 3.3-4	SCAQMD Air Quality Significance Thresholds	3.3-5
Table 3.3-5	Localized Significance Thresholds for Temecula Valley—5-Acre Source Size	3.3-6
Table 3.3-6	Maximum Daily Construction Emissions	3.3-10
Table 3.3-7	Maximum Daily Operations Emissions.....	3.3-10
Table 3.3-8	Localized Construction Emissions for Temecula Valley (5-Acre Source Size, Closest Receptor at 150 ft).....	3.3-11
Table 3.3-9	Estimated CO ₂ and CH ₄ Emissions from Construction	3.3-12
Table 3.3-10	Estimated CO ₂ and CH ₄ Vehicle Emissions from Routine Inspections	3.3-13
Table 3.3-11	Estimated Fugitive SF ₆ Emissions.....	3.3-13

Table 3.4-1	Biological Resources Checklist	3.4-1
Table 3.5-1	Cultural Resources Checklist.....	3.5-1
Table 3.6-1	Geology and Soils Checklist	3.6-1
Table 3.6-2	Geologic Conditions	3.6-2
Table 3.6-3	Soil Types and Characteristics	3.6-5
Table 3.7-1	Hazards And Hazardous Materials Checklist.....	3.7-1
Table 3.7-2	Schools Within 0.25 miles of the Telecommunication Lines	3.7-2
Table 3.8-1	Hydrology and Water Quality Checklist	3.8-1
Table 3.9-1	Land Use and Planning Checklist.....	3.9-1
Table 3.10-1	Mineral Resources Checklist.....	3.10-1
Table 3.11-1	Noise Checklist.....	3.11-1
Table 3.11-2	Equipment Types and Typical Noise Emission Levels	3.11-6
Table 3.11-3	Predicted Construction Equipment Noise Levels versus Distance	3.11-7
Table 3.12-1	Population and Housing Checklist	3.12-1
Table 3.12-2	Project Area Populations, Households, and Projections.....	3.12-1
Table 3.12-3	Project Area Housing	3.12-2
Table 3.12-4	Project Area Employment.....	3.12-2
Table 3.13-1	Public Services Checklist	3.13-1
Table 3.13-2	Public Service Providers by Jurisdiction	3.13-2
Table 3.13-3	Schools Within 2 Miles of the Triton Substation Site.....	3.13-3
Table 3.14-1	Recreation Checklist.....	3.14-1
Table 3.15-1	Transportation/Traffic Checklist	3.15-1
Table 3.15-2	Regional Roadway Characteristics.....	3.15-2

Table 3.15-3	Distribution of Construction Worker Generated Traffic.....	3.15-4
Table 3.16-1	Utilities and Service Systems Checklist.....	3.16-1
Table 3.16-2	Utilities and Service Systems Summary by Jurisdiction	3.16-2
Table 3.16-3	Landfills Serving the Project Area	3.16-2
Table 3.17-1	Mandatory Findings of Significance Criteria	3.17-1
Table 3.17-2	Projects in Southwest Riverside County Listed on EPA Database	3.17-12
Table 3.17-3	Projects in Southwest Riverside County with Notices of Preparation Filed with the OPR.....	3.17-14
Table 3.17-4	Projects in Southwest Riverside County filed with Riverside County	3.17-21
Table 3.17-5	Temecula Wine Country.....	3.17-22
Table 3.17-6	City of Temecula – Current Planning Projects.....	3.17-23
Table 3.17-7	City of Murrieta - Current Planning Projects.....	3.17-31
Table 5-1	Mitigation Monitoring, Reporting, and.....	5-3
Table A-1	Alternative Substation Location Summary—Triton Substation Project	A-7

This page intentionally left blank

Figures

Figure 1-1	Regional Map	1-3
Figure 1-2	Project Overview and Electrical Needs Area	1-5
Figure 1-3	Project Features	1-9
Figure 1-4	Tubular Steel Pole for 115 kV Double-Circuit with 12 kV Single-Circuit and Telecommunications Line Underbuilds	1-13
Figure 3.1-1	City of Temecula Community Design Plan.....	3.1-3
Figure 3.1-2	KOP 1 – Existing view of the Triton Substation site looking southeast from Liefer Road at a point immediately north of the intersection with Nicolas Road	3.1-7
Figure 3.1-3	KOP 2 and Visual Simulations.....	3.1-9
Figure 3.1-4	KOP 3 – Existing view looking east from the intersection of Nicolas Road and Calle Golibri west of the Canine Substation.....	3.1-11
Figure 3.1-5	Key Observation Points (KOP).....	3.1-13
Figure 3.3-2	California’s CO₂ Emission Reduction Strategies (CEC 2007)...	3.3-8
Figure 3.6-1	Regional Fault Line and Earthquake Epicenter Map	3.6-3
Figure 3.8-1	Flood Hazard and Dam Inundation Areas	3.8-3
Figure 3.8-2	Santa Gertrudis Creek (Northeast corner of Nicolas Road and Calle Medusa, directly across from the Triton Substation site).....	3.8-5
Figure 3.11-1	Noise Sensitive Receptors Near the Triton Substation Site ...	3.11-3
Figure 3.11.2	Expected Corona Noise Levels for the Double-Circuit 115 kV Subtransmission Line Loop-in.....	3.11-9
Figure A-1	Alternatives A, B, and C.....	A-3
Figure A-2	Site Alternatives 1 – 15 and Seraphina and Garrett/Boy Scout Sites.....	A-5
Figure C-1	Potential Biological Constraints Map A.....	C-1

Figure C-2 Potential Biological Constraints Map B..... C-2

Figure C-3 Potential Biological Constraints Map C..... C-3

Figure C-4 Potential Biological Constraints Map D..... C-4

Figure C-5 Potential Biological Constraints Map E..... C-5

Figure C-6 Potential Biological Constraints Map F C-6

Figure C-7 Potential Biological Constraints Map G C-7